

KITCHEN EXTRACT

---

# MFU RANGE

---

MULTI FILTRATION UNIT

US Version 1.1

purified<sup>®</sup>air

# COMMERCIAL KITCHEN FILTRATION EXPERTS

Purified Air Ltd. has been manufacturing and servicing market-leading technology to filter and control oil, grease, smoke and odour from commercial kitchens since 1984.

## CONTENTS

02

### TECHNICAL OVERVIEW

|                          |    |
|--------------------------|----|
| Key Features             | 02 |
| Our Filters              | 03 |
| How It Works             | 06 |
| Modular System           | 07 |
| Technical Specifications | 08 |

12

### ABOUT US

|              |
|--------------|
| An Overview  |
| Our Coverage |

13

### GET IN TOUCH

|                 |
|-----------------|
| Contact Details |
|-----------------|

KITCHEN EXTRACT

MFU RANGE

MULTI-FILTRATION UNIT



Our MFUs are designed explicitly for kitchen extract systems; they collect the oil, grease and smoke particles filtered out of the exhaust through a combination of passive air filters, including panel, bag, HEPA and carbon.

The high-quality unit can house multiple filter combinations and is effortlessly serviced, replaced or even re-configured to provide continually effective and affordable kitchen extract particulate control. Additionally, the units help reduce grease build-up within the ducting and reduce odours.

Its modular design means units can be configured in various ways to handle any required flow rate, providing effective and efficient kitchen extract filtration.

KEY FEATURES

- ▶ Built for stock
- ▶ Multiple configurations
- ▶ Eliminates oil, grease, smoke particles and odours
- ▶ Modular in design
- ▶ Filters particles down to submicron levels
- ▶ Endless combinations of passive filtration
- ▶ Specifically designed for commercial kitchen application
- ▶ Greatly reduces grease build-up within the duct run

FILTERS REMOVE



Smoke



Steam



Oil



Grease



# OUR FILTERS

## PANEL FILTERS



Our pleated panel filters are constructed using a core of pleated fibrous media designed specifically for use in air filtration. This is then thermally bonded onto a galvanised steel support mesh for maximum rigidity which is then fully bonded into a moisture resistant rigid white lined card frame. These filters are used as stand-alone pre filters or as a pre filter to bag filters filtering oil and grease particles.

## BAG FILTERS



Our general purpose bag filters are manufactured using a galvanised steel header to retain the pocket sets.


The pockets are produced from synthetic micro-fibres specifically designed for use in air filtration. They can be applied as a pre filter to carbon cells in malodour extraction, taking out oil and grease particles ahead of the carbon filter stage.

## HEPA FILTERS




To qualify to be called a High-Efficiency Particulate Air or HEPA filter, the filter must be able to remove, from the air that passes through it, 99.97% of particles down to a sub-micron level. Our main use of HEPA filtration is the removal of smoke particles. We do supply many different sizes and grades of HEPA filters so please contact us with your requirements.

## CARBON FILTERS

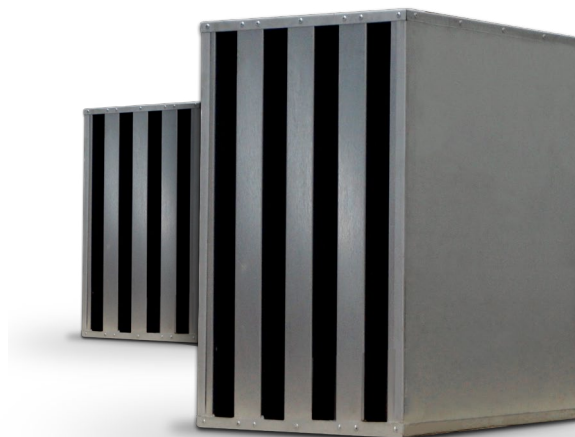

Our site safe carbon filters use panels of activated carbon to remove the malodorous gases within the commercial kitchen extract duct through the process of chemical adsorption. By installing adequate pre-filtration before our site safe filters, the carbon life span is greatly increased, allowing it to nullify malodours at optimum efficiency for much longer.

# HOW IT WORKS

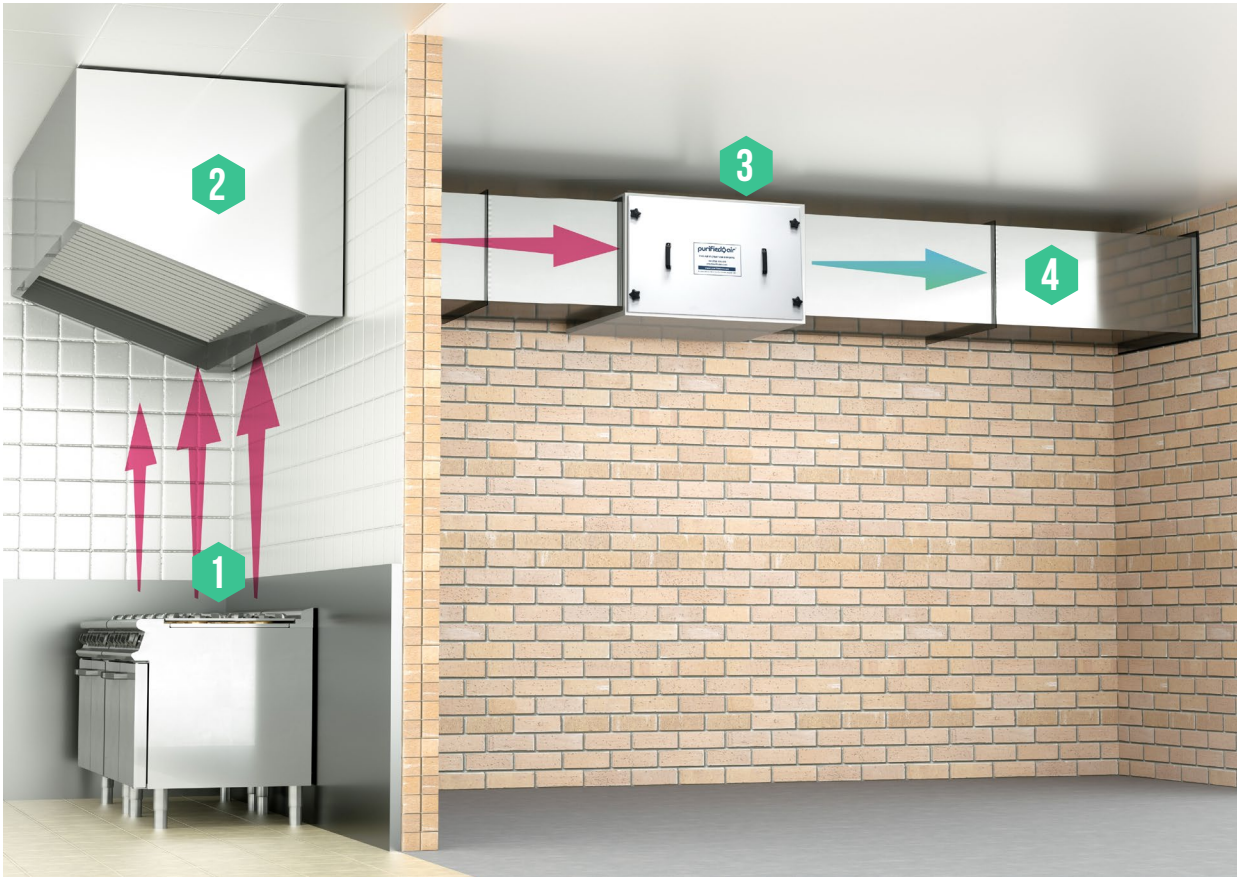

Our MFUs fit in line with the kitchen ducting and can be configured modularly to cope with all extract flow rates.

- 01 Cooking particulates and odours
- 02 Canopy Grease Filter

- 03 MFU Unit
- 04 Airflow

## OUR SERVICES



Design



Manufacture



Maintain

# MODULAR SYSTEM

Our system allows specifiers and installers to create a wide range of configurations which contain a customisable combination of different air filters. This provides a tailored, cost-effective air filtration solution.

## MFU 600



## MFU 1200



## MFU 1800



## SAMPLE CONFIGURATIONS

### 2 X MFU 600




### 2 X MFU 1800



# TECHNICAL SPECIFICATIONS

| GLOBAL SPECIFICATIONS |                        |           |             |            |             |
|-----------------------|------------------------|-----------|-------------|------------|-------------|
| FILTERS               |                        | Width(in) | Height (in) | Depth (in) | Weight (lb) |
| Panel                 | 3.7 in                 | 23.4      | 23.4        | 3.7        | 1.1         |
| Bag                   | 11.8 In                | 23.3      | 23.3        | 11.8       | 3.3         |
| HEPA                  | 11.8 In                | 23.3      | 23.3        | 11.8       | 39.7        |
| Carbon                | Site Safe (7.7 in)     | 23.4      | 23.5        | 7.7        | 39.7        |
|                       | Carbon Block (11.7 in) | 23.4      | 23.4        | 11.7       | 72.7        |
| CASINGS ONLY          |                        |           |             |            |             |
| MFU 600               |                        | 23.6      | 24.9        | 36.4       | 123         |
|                       |                        |           |             |            |             |
| MFU 1200              |                        | 47.2      | 24.9        | 36.4       | 172         |
|                       |                        |           |             |            |             |
| MFU 1800              |                        | 70.9      | 24.9        | 36.4       | 258         |
|                       |                        |           |             |            |             |


## MFU 600

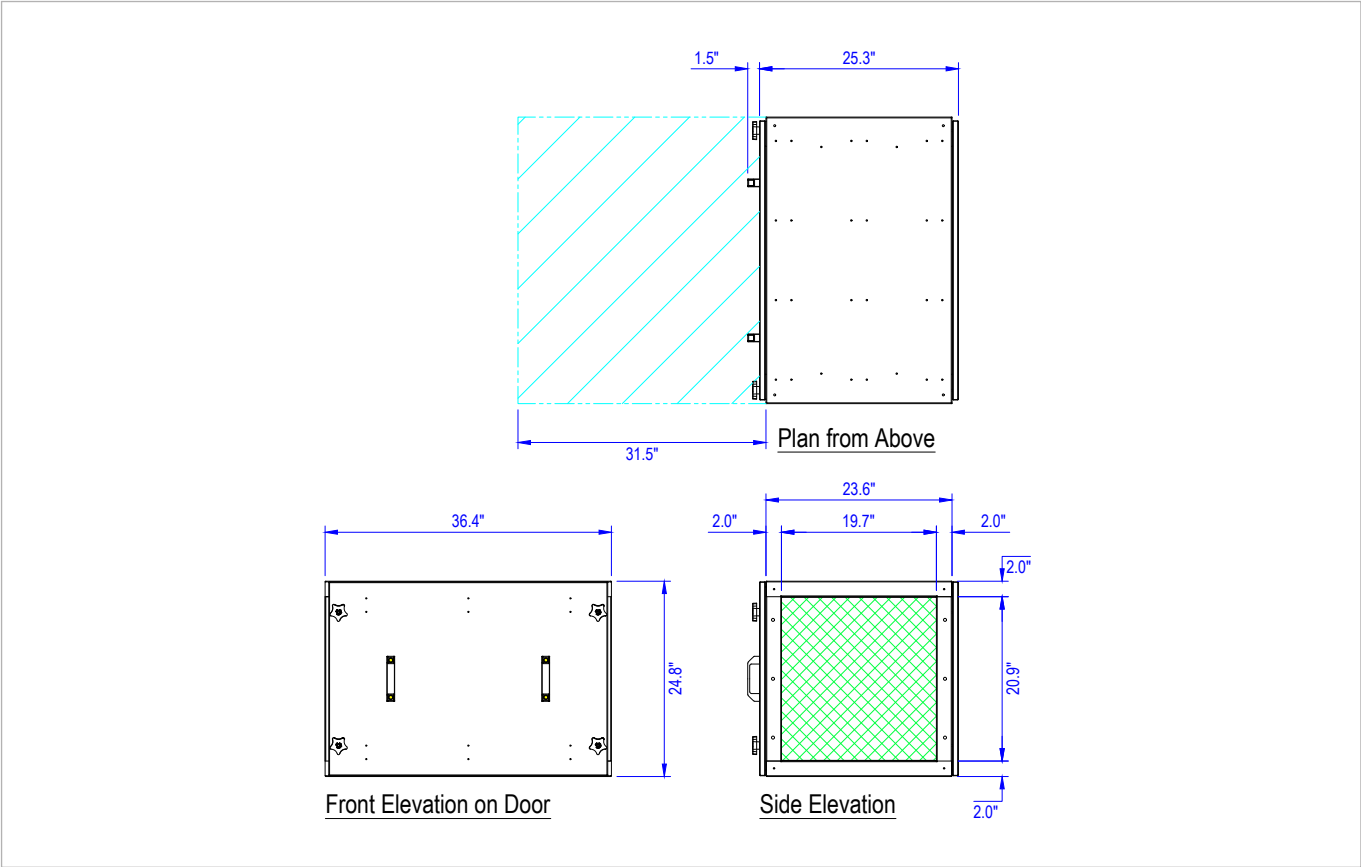


| MFU 600       |                        |          |              |          |          |          |
|---------------|------------------------|----------|--------------|----------|----------|----------|
|               |                        | Model A1 | Model A1 (C) | Model B1 | Model E2 | Model F2 |
| Panel         | 3.7 in                 | 1        |              | 1        | 1        | 1        |
| Bag           | 11.8 In                |          |              | 1        |          | 1        |
| HEPA          | 11.8 In                |          |              | 1        |          | 1        |
| Carbon        | Site Safe (7.7 in)     | 3        | 3            |          | 6        | 3        |
|               | Half Carbon (11.7 in)  |          |              |          |          |          |
| Flow Rate*    | Maximum (CFM)          | 2120     | 2120         | 2120     | 2120     | 2120     |
| Weight (lb)   |                        | 242      | 241          | 168      | 485      | 410      |
| No. Units     |                        | Single   | Single       | Single   | Double   | Double   |
| Pressure Drop | at 1500 CFM (wg)       | 0.33     | 0.47         | 0.8      | 0.83     | 1.14     |
| Dimensions    |                        |          |              |          |          |          |
| Width (in)    |                        | 23.6     | 23.6         | 23.6     | 23.6     | 23.6     |
| Height (in)   |                        | 24.9     | 24.9         | 24.9     | 24.9     | 24.9     |
| Depth (in)    | (Direction of airflow) | 36.4     | 36.4         | 36.4     | 72.8     | 72.8     |

\* Flow Rate – unit selection dependent on air flow rate and cooking style

MFU 1200

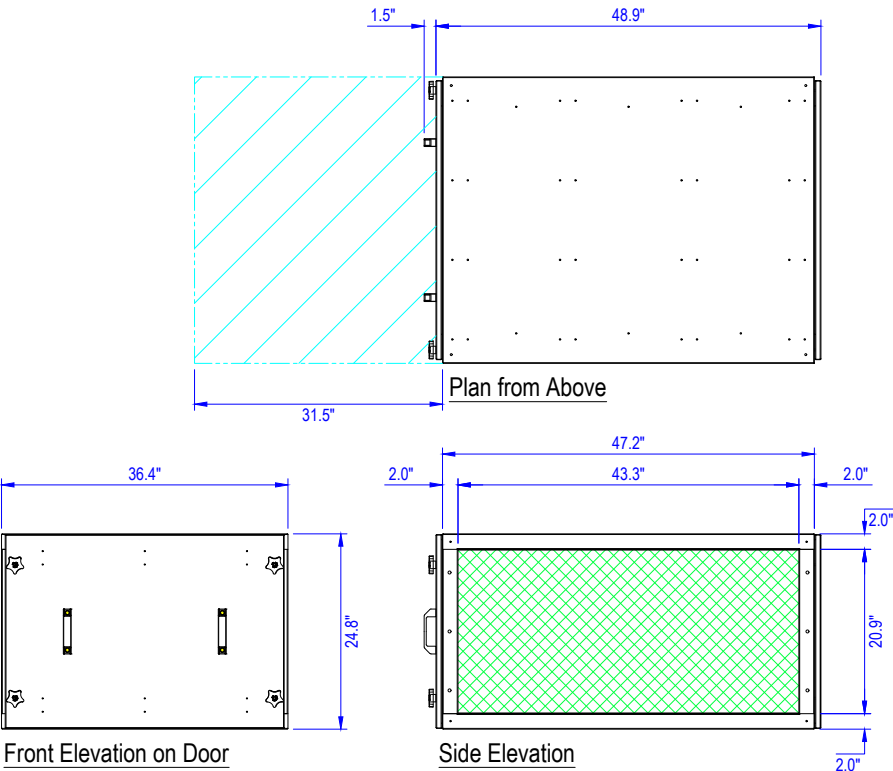

MFU 1800

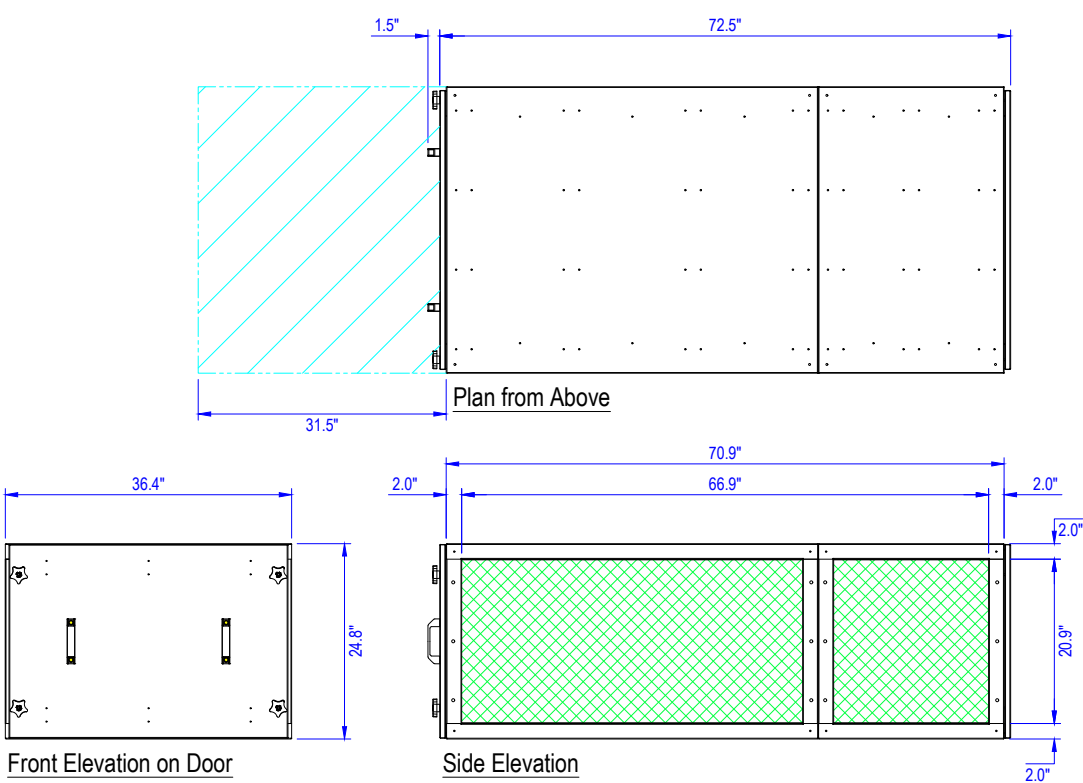

| MFU 1200      |                        |          |              |          |          |          |
|---------------|------------------------|----------|--------------|----------|----------|----------|
|               |                        | Model A1 | Model A1 (C) | Model B1 | Model E2 | Model F2 |
| Panel         | 3.7 in                 | 2        |              | 2        | 2        | 2        |
| Bag           | 11.8 In                |          |              | 2        |          | 2        |
| HEPA          | 11.8 In                |          |              | 2        |          | 2        |
| Carbon        | Site Safe (7.7 in)     | 6        | 6            |          | 12       | 6        |
|               | Half Carbon (11.7 in)  |          |              |          |          |          |
| Flow Rate*    | Maximum (CFM)          | 4240     | 4240         | 4240     | 4240     | 4240     |
| Weight (lb)   |                        | 412      | 410          | 260      | 822      | 670      |
| No. Units     |                        | Single   | Single       | Single   | Double   | Double   |
| Pressure Drop | at 3180 CFM (wg)       | 0.49     | 0.72         | 0.86     | 0.86     | 1.22     |
| Dimensions    |                        |          |              |          |          |          |
| Width (in)    |                        | 47.2     | 47.2         | 47.2     | 47.2     | 47.2     |
| Height (in)   |                        | 24.9     | 24.9         | 24.9     | 24.9     | 24.9     |
| Depth (in)    | (Direction of airflow) | 36.4     | 36.4         | 36.4     | 72.8     | 72.8     |

\* Flow Rate – unit selection dependent on air flow rate and cooking style

| MFU 1800      |                        |          |              |          |          |          |
|---------------|------------------------|----------|--------------|----------|----------|----------|
|               |                        | Model A1 | Model A1 (C) | Model B1 | Model E2 | Model F2 |
| Panel         | 3.7 in                 | 3        |              | 3        | 3        | 3        |
| Bag           | 11.8 In                |          |              | 3        |          | 3        |
| HEPA          | 11.8 In                |          |              | 3        |          | 3        |
| Carbon        | Site Safe (7.7 in)     | 9        | 9            |          | 18       | 9        |
|               | Half Carbon (11.7 in)  |          |              |          |          |          |
| Flow Rate*    | Maximum (CFM)          | 6355     | 6355         | 6355     | 6355     | 6355     |
| Weight (lb)   |                        | 618      | 615          | 390      | 1234     | 1006     |
| No. Units     |                        | Single   | Single       | Single   | Double   | Double   |
| Pressure Drop | at 5300 CFM (wg)       | 0.53     | 0.83         | 0.89     | 1.0      | 1.3      |
| Dimensions    |                        |          |              |          |          |          |
| Width (in)    |                        | 70.9     | 70.9         | 70.9     | 70.9     | 70.9     |
| Height (in)   |                        | 24.9     | 24.9         | 24.9     | 24.9     | 24.9     |
| Depth (in)    | (Direction of airflow) | 36.4     | 36.4         | 36.4     | 72.8     | 72.8     |

\* Flow Rate – unit selection dependent on air flow rate and cooking style




## ABOUT US

Purified Air Ltd. has been striving to find the best and most cost-effective way to filter and control oil, smoke, fat and odour produced by commercial kitchens and service since 1984.

Purified Air manufactures filtration and odour control products for stock and bespoke systems, supplying systems to many sectoral brands. The design of each solution is based on the type of food cooked, the cooking process used, and the extracted air volume providing tried and tested purified kitchen exhaust air for Fast Food, Casual Dining and Luxury Concept Restaurant (Fine Dining) markets. By working with these variables, we can design and supply some of the world's best commercial kitchen filtration and odour control systems.

### WORLDWIDE COVERAGE

- United Kingdom
- Middle East
- Europe
- North America
- Asia
- Australasia

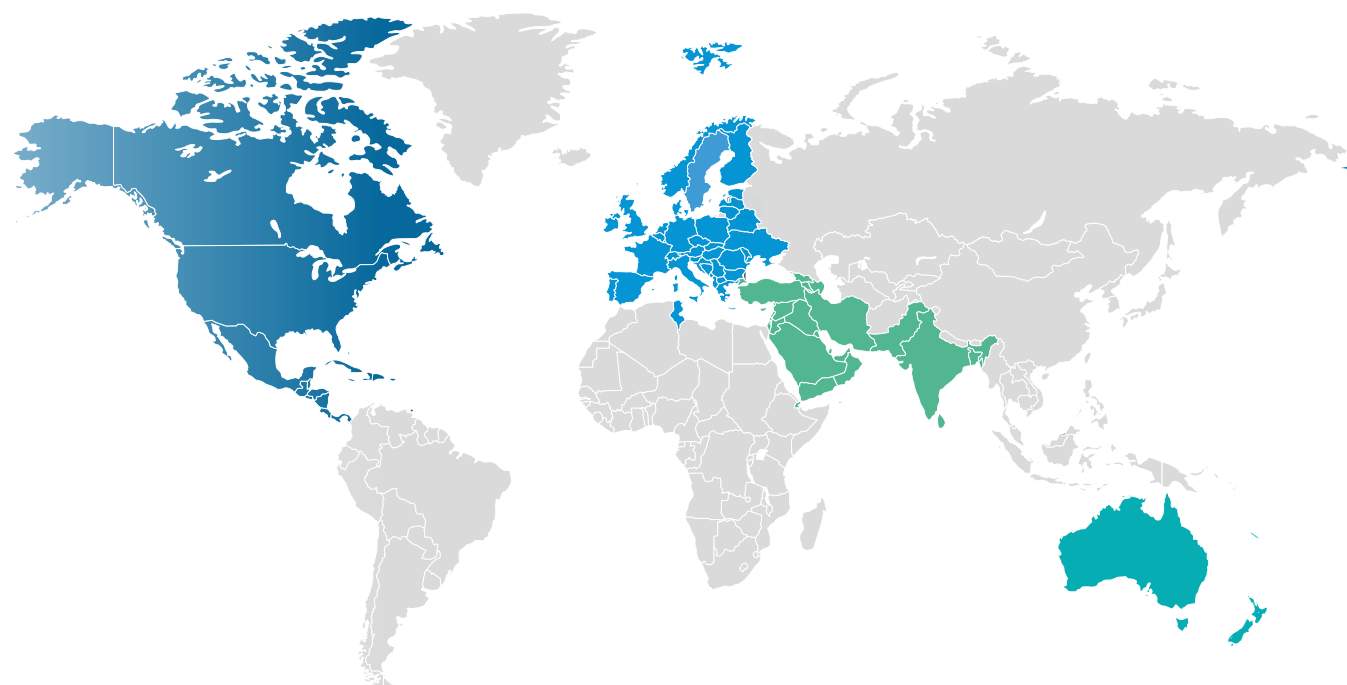

# GET IN TOUCH

+44 (0) 1708 755 414

enq@purifiedair.com

Purified Air Limited, Lyon House  
Lyon Road, Romford,  
Essex RM1 2BG, United Kingdom

[purifiedair.com](https://www.purifiedair.com)





purifiedair®

[purifiedair.com](https://purifiedair.com)